


PROJECT:		PREPARED BY:	
PART #		QTY:	
NOTES:		DATE:	





Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch)W*H*L
LL0213BS/BM-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	70	Samsung	300	BS: suspended with 1.5m power cable and safety cable	Silicon+Alu	D300*18/*45	D11.8*0.71/*1.78
LL0213BS/BM-60W		60W									D400*18/*45	D15.7*0.71/*1.78
LL0213BS/BM-80W		80W									D600*18/*45	D23.6*0.71/*1.78
LL0213BS/BM-125W		125W									D900*18/*45	D35.1*0.71/*1.78
LL0213BS/BM-150W		150W									D1200*18/*45	D47.2*0.71/*1.78



Cloud series with a unique shape and proportions, widely use for general lighting applications. Available in multiple diameter sizes from 11.8" up to 47.2"; mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.




Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.


Application:

Hotel, office, restaurant, public building, etc.



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch)W*H*L
LL0214BS/BM-50W	AC220-240V or AC120-277V 50/60Hz	50W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	300	BS: suspended with 1.5m power cable and safety cable BM: surface mounted	Silicon+Alu	300*300*18/*45	11.8*11.8*0.71/*1.78
LL0214BS/BM-60W		60W									400*400*18/*45	15.7*15.7*0.71/*1.78
LL0214BS/BM-90W		90W									500*500*18/*45	19.7*19.7*0.71/*1.78
LL0214BS/BM-125W		125W									500*900*18/*45	19.7*35.4*0.71/*1.78
LL0214BS/BM-150W		150W									1100*650*18/*45	43.3*25.6*0.71/*1.78



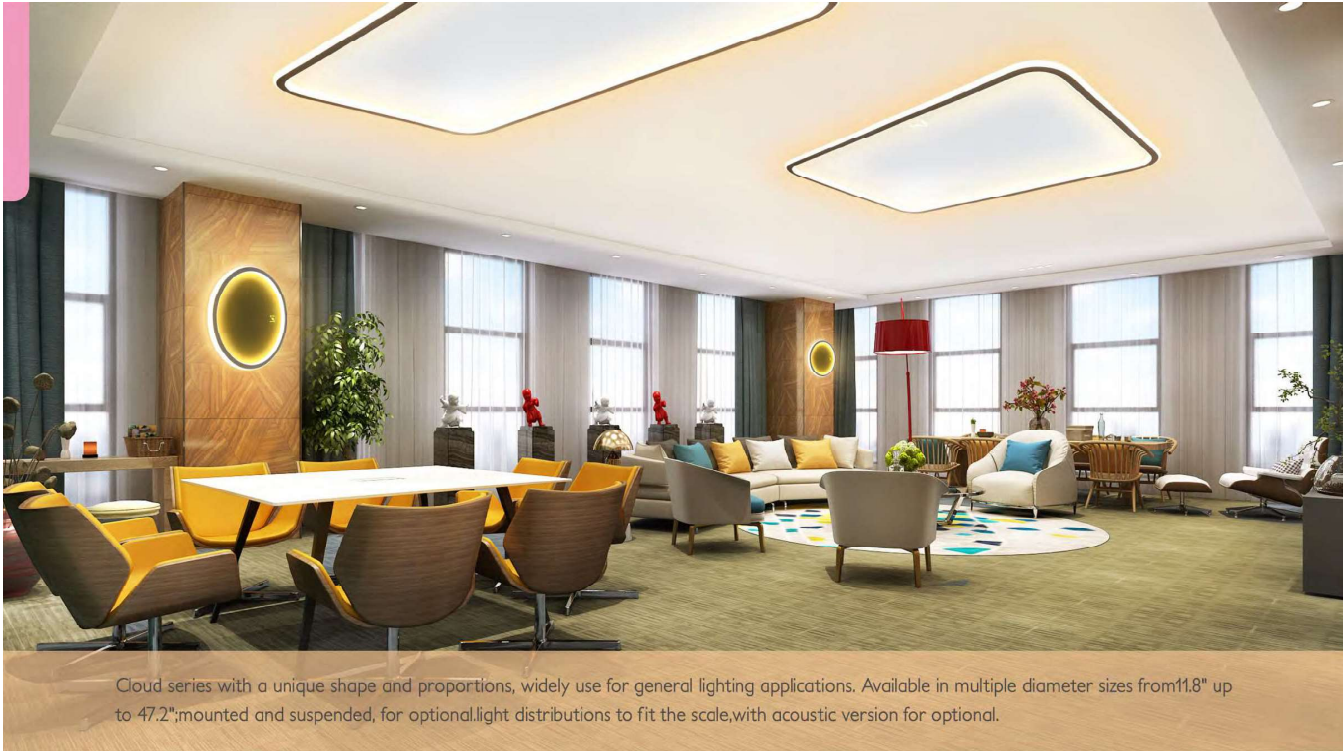

Cloud series with a unique shape and proportions, widely use for general lighting applications. Available in multiple diameter sizes from 11.8" up to 47.2"; mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.





Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch)W*H*L
LL0214AS-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥80 or ≥90	3000K/4000K/5000K	≥0.9	70	Samsung	300	suspended with 1.5m power cable and safety cable	Silicon+Alu	300*300*18	11.8*11.8*0.71
LL0214AS-50W		50W									400*400*18	15.7*15.7*0.71
LL0214AS-72W		72W									500*500*18	19.7*19.7*0.71
LL0214AS-100W		100W									500*900*18	19.7*35.4*0.71
LL0214AS-150W		150W									1100*650*18	43.3*25.6*0.71
LL0214AM-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥80 or ≥90	3000K/4000K/5000K	≥0.9	70	Samsung	300	surface mounted	Silicon+Alu	300*300*45	11.8*11.8*1.78
LL0214AM-50W		50W									400*400*45	15.7*15.7*1.78
LL0214AM-72W		72W									500*500*45	19.7*19.7*1.78
LL0214AM-100W		100W									500*900*45	19.7*35.4*1.78
LL0214AM-150W		150W									1100*650*45	43.3*25.6*1.78



Cloud series with a unique shape and proportions, widely use for general lighting applications. Available in multiple diameter sizes from 11.8" up to 47.2", mounted and suspended, for optional light distributions to fit the scale, with acoustic version for optional.






Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.



Application:

Hotel, office, restaurant, public building, etc.



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch)W*H*L
LL0213AS/AM-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	300	AS: suspended with 1.5m power cable and safety cable	Silicon+Alu	D300*18/*45	D11.8*0.71*1.78
LL0213AS/AM-45W		45W									D400*18/*45	D15.7*0.71*1.78
LL0213AS/AM-60W		60W									D600*18/*45	D23.6*0.71*1.78
LL0213AS/AM-100W		100W									D900*18/*45	D35.4*0.71*1.78
LL0213AS/AM-135W		135W									D1200*18/*45	D47.2*0.71*1.78
LL0213AS/AMAC-32W	AC220-240V or AC120-277V 50/60Hz	32W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	300	AS: suspended with 1.5m power cable and safety cable	Silicon+Alu +polyester fiber	D300*28/*55	D11.8*1.1*2.16
LL0213AS/AMAC-45W		45W									D400*28/*55	D15.7*1.1*2.16
LL0213AS/AMAC-60W		60W									D600*28/*55	D23.6*1.1*2.16
LL0213AS/AMAC-100W		100W									D900*28/*55	D35.4*1.1*2.16
LL0213AS/AMAC-135W		135W									D1200*28/*55	D47.2*1.1*2.16




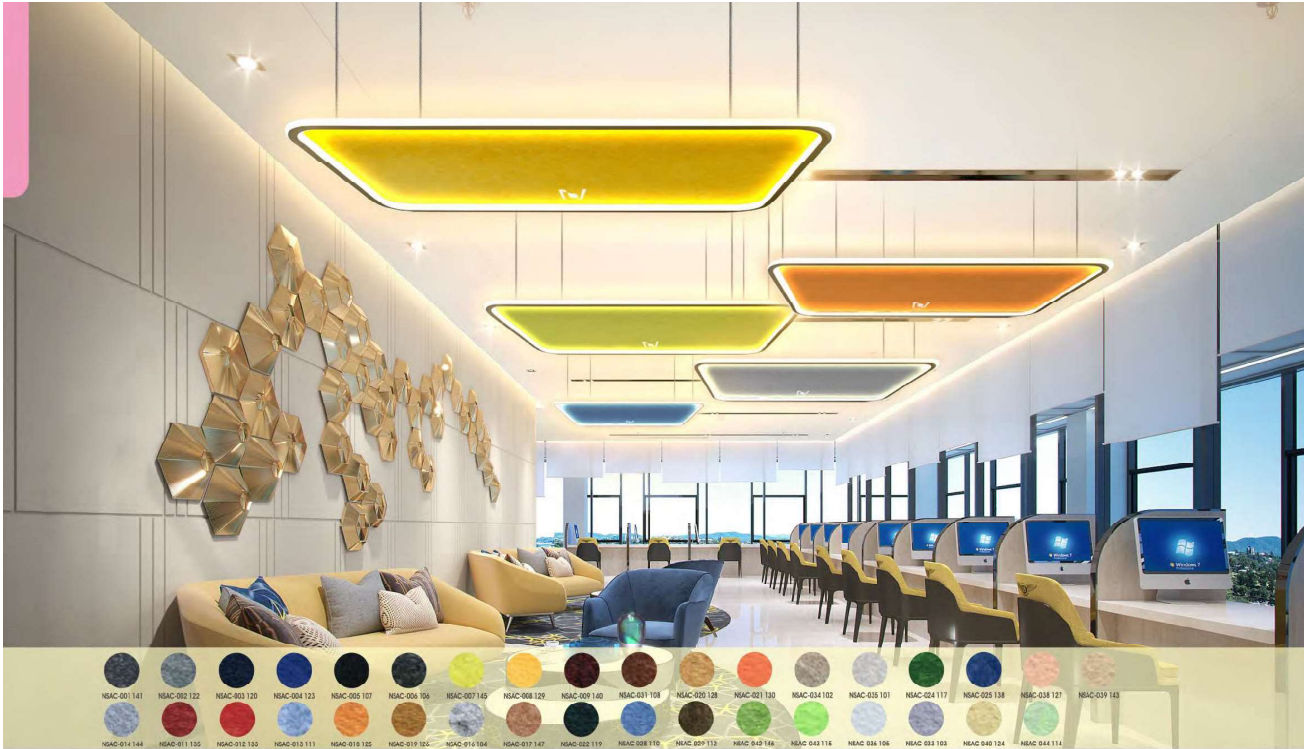


Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:

Hotel, office, restaurant, public building, etc.



Model	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch)W*H*L
LL0214ASAC-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	300	surface mounted	Silicon+Alu +polyester fiber	300*300*28	11.8*11.8*1.1
LL0214ASAC-50W		50W									400*400*28	15.7*15.7*1.1
LL0214ASAC-72W		72W									500*500*28	19.7*19.7*1.1
LL0214ASAC-100W		100W									500*900*28	19.7*35.4*1.1
LL0214ASAC-150W		150W									1100*650*28	43.3*25.6*1.1
LL0214AMAC-40W	AC220-240V or AC120-277V 50/60Hz	40W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	70	Samsung	300	suspended with 1.5m power cable and safety cable	Silicon+Alu +polyester fiber	300*300*55	11.8*11.8*2.16
LL0214AMAC-50W		50W									400*400*55	15.7*15.7*2.16
LL0214AMAC-72W		72W									500*500*55	19.7*19.7*2.16
LL0214AMAC-100W		100W									500*900*55	19.7*35.4*2.16
LL0214AMAC-150W		150W									1100*650*55	43.3*25.6*2.16