


PROJECT:		PREPARED BY:	
PART #		QTY:	
NOTES:		DATE:	



**Linear
(Suspended & Mounted)
Series**

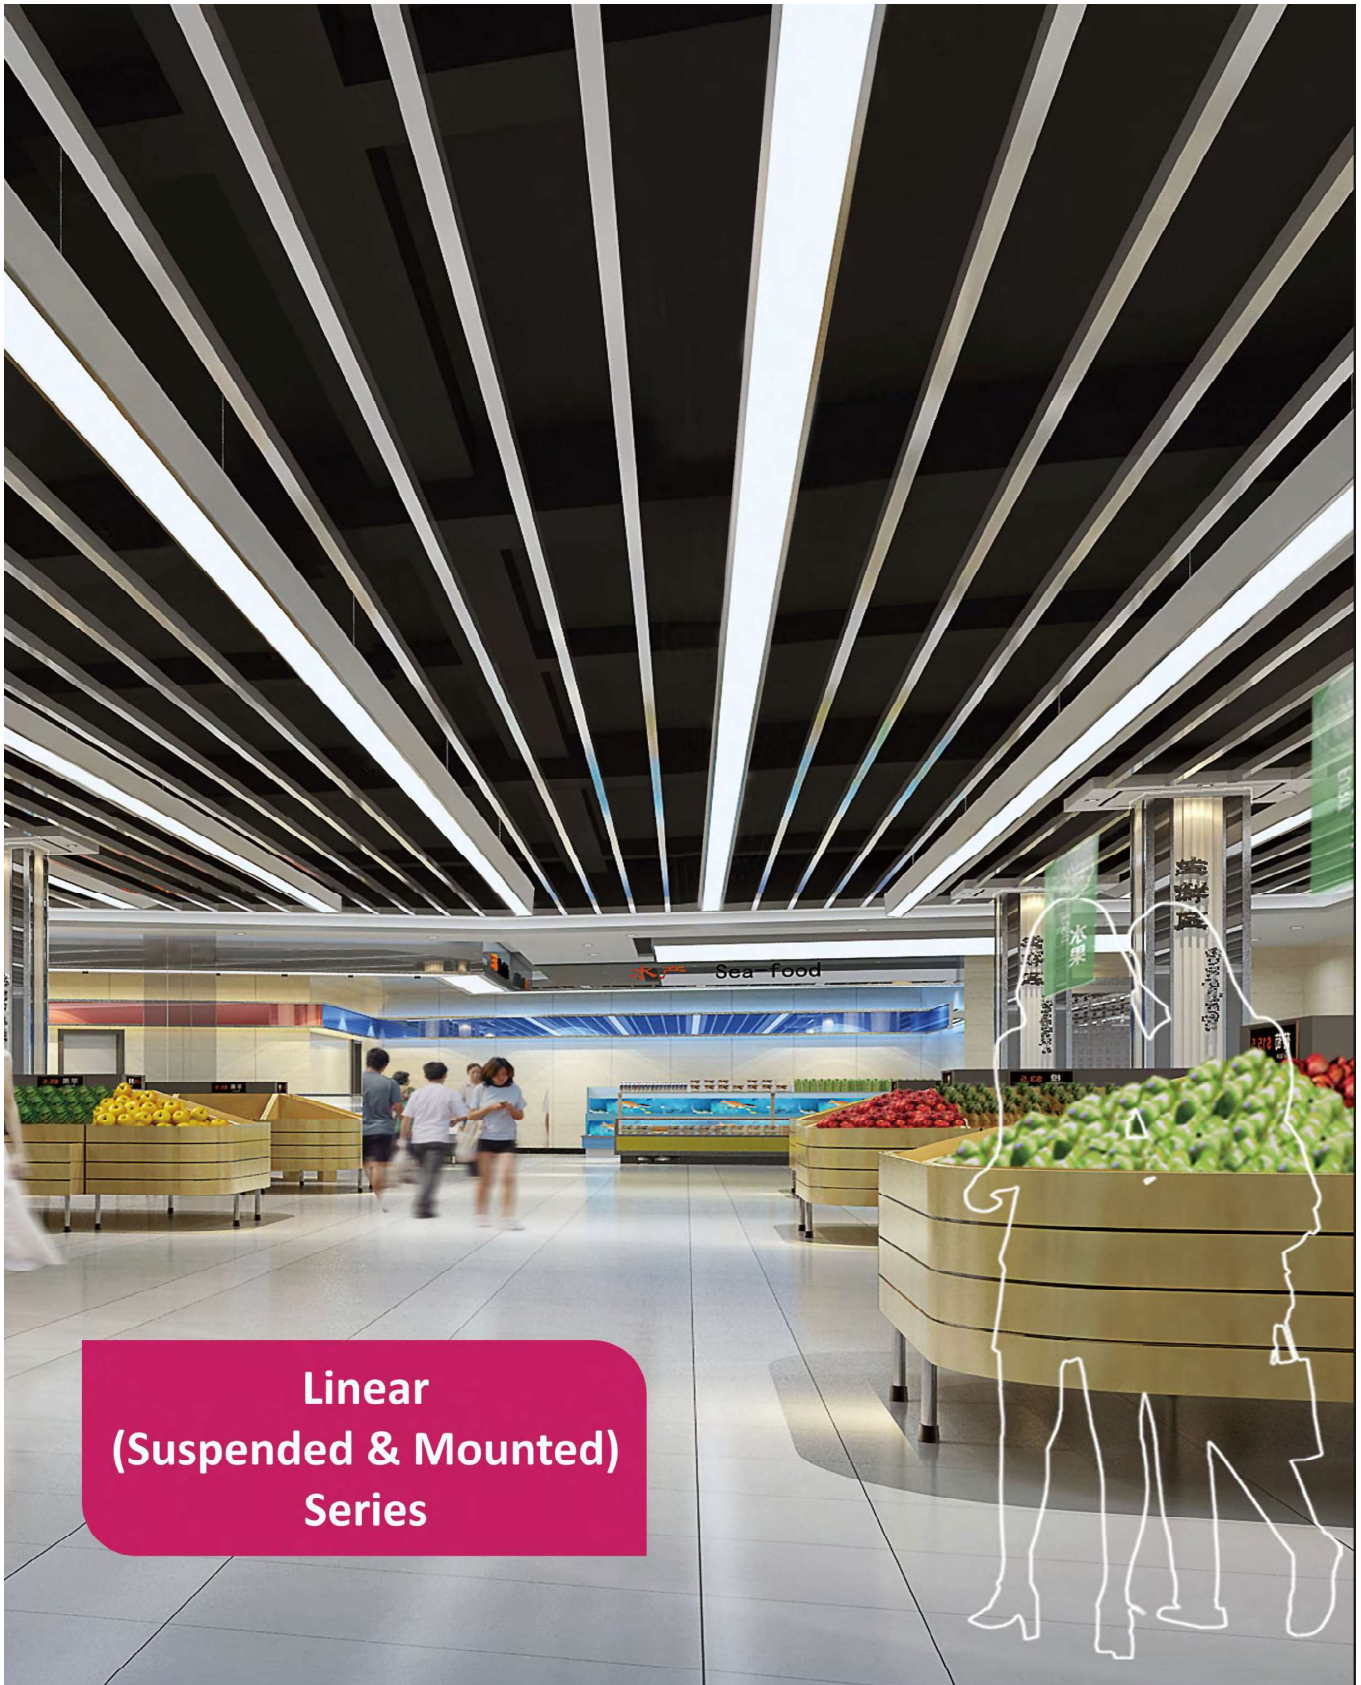

PROJECT:		PREPARED BY:	
PART #		QTY:	
NOTES:		DATE:	

Linear (Suspended and Mounted) Series




Features:

- Streamline design style, can be seamless connection with any dimension, with an elegant presentation;
- Can be grouped to different patterns to match the architecture style;
- High efficiency and energy saving;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Different profile sizes are available to well light up the space!


Application:

Hotel, hospital, shopping mall, showroom, supermarket, office, KTV, museum, cinema, public buildings, etc.

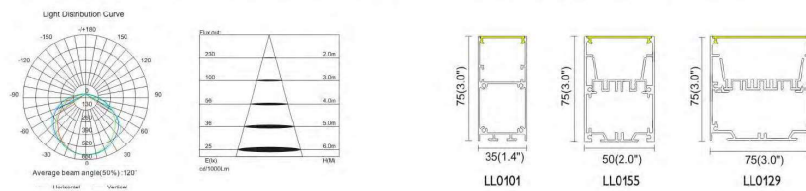

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0101S LL0101M	LL0101S-1200	AC220-240V	36W	≥80	3000K/	≥0.9	105	Osram	120	Suspended / Mounted	Alu+PC	35*75*1200	14*3.0*47.2
	LL0101S-1500	or AC120-277V	50W	or ≥90	4000K/							35*75*1500	14*3.0*59.1
	LL0101S-2400	50/60Hz	70W		5000K							35*75*2400	14*3.0*94.5
LL0155S LL0155M	LL0155S-1200	AC220-240V	40W	≥80	3000K/	≥0.9	105	Osram	120	Suspended / Mounted	Alu+PC	50*75*1200	2.0*3.0*47.2
	LL0155S-1500	or AC120-277V	50W	or ≥90	4000K/							50*75*1500	2.0*3.0*59.1
	LL0155S-2400	50/60Hz	80W		5000K							50*75*2400	2.0*3.0*94.5
LL0129S LL0129M	LL0129S-1200	AC220-240V	50W	≥80	3000K/	≥0.9	105	Osram	120	Suspended / Mounted	Alu+PC	75*75*1200	3.0*3.0*47.2
	LL0129S-1500	or AC120-277V	70W	or ≥90	4000K/							75*75*1500	3.0*3.0*59.1
	LL0129S-2400	50/60Hz	100W		5000K							75*75*2400	3.0*3.0*94.5






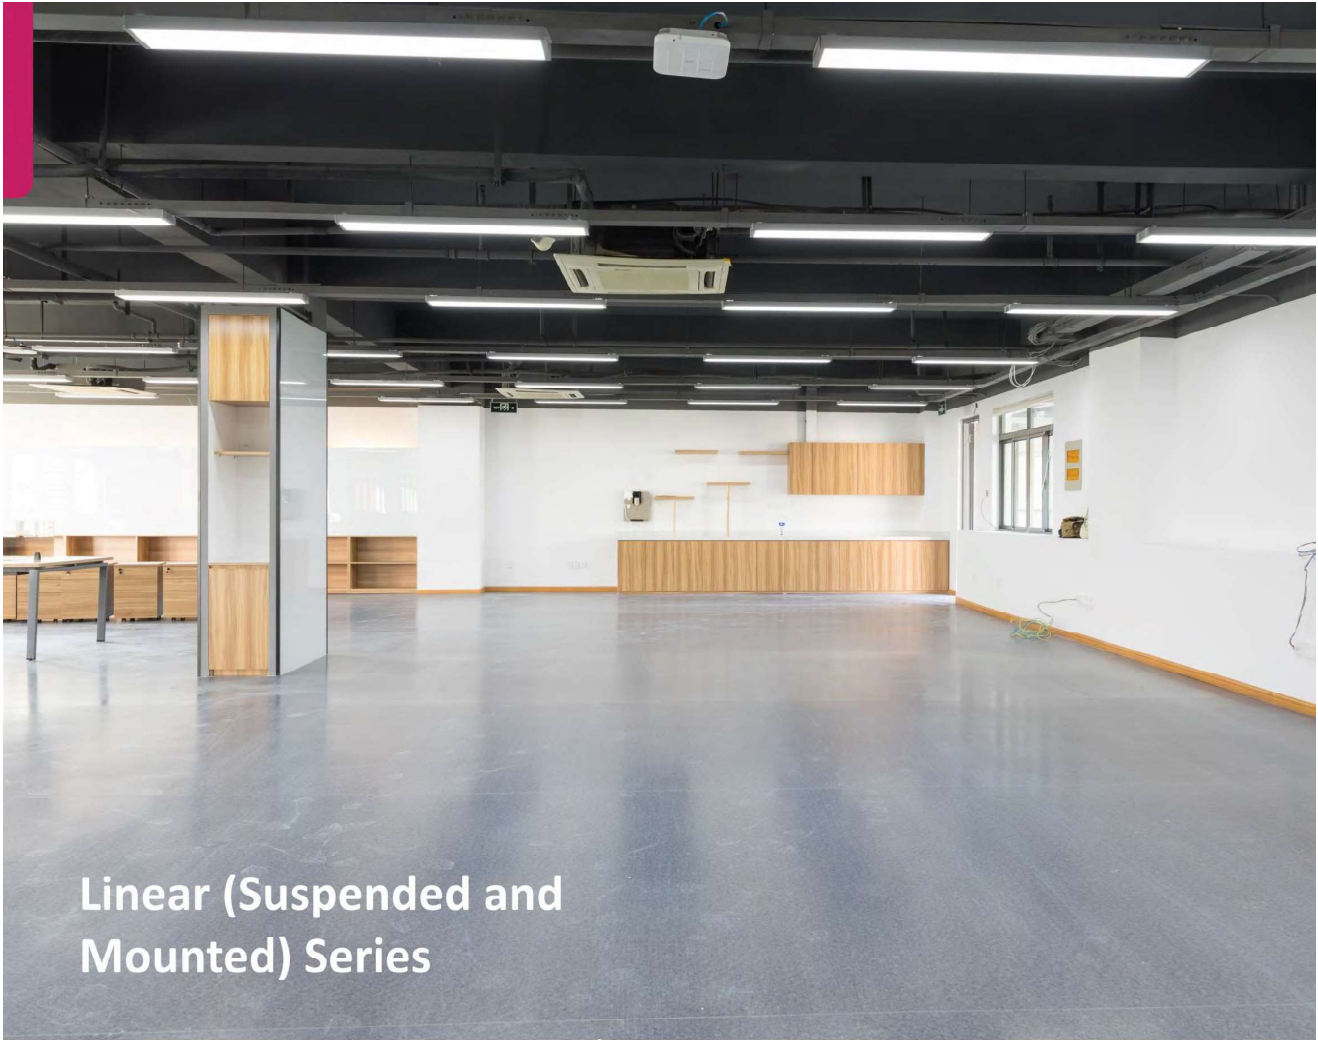

Linear (Suspended and Mounted) Series



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficacy(LM/W): 105
 LED type: Osram
 Beam(degree): 120
 Installation: Suspended/Mounted
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) W*H*L	Size(Inch) W*H*L
LL0126S/M-1200	60W	AC220-240V or AC120-277V 50/60-Hz	100*70*1200	3.9*2.8*47.2
LL0126S/M-1500	100W		100*70*1500	3.9*2.8*59.1
LL0126S/M-2400	120W		100*70*2400	3.9*2.8*94.5
LL0130S/M-1200	60W	AC220-240V or AC120-277V 50/60-Hz	120*70*1200	4.7*2.8*47.2
LL0130S/M-1500	100W		120*70*1500	4.7*2.8*59.1
LL0130S/M-2400	120W		120*70*2400	4.7*2.8*94.5


PROJECT:		PREPARED BY:	
PART #		QTY:	
NOTES:		DATE:	

NSL SERIES - LINEAR



Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0120S LL0120M	LL0120S-1200	AC220-240V	50W	≥80	3000K/	≥0.9	105	Osram	120*2	Suspended / Mounted	Alu+PC	50*90*1200	2.0*3.5*47.2
	LL0120S-1500	or AC220-277V	70W	or 4000K/	50*90*1500							2.0*3.5*59.1	
	LL0120S-2400	50/60Hz	100W	≥90 5000K	50*90*2400							2.0*3.5*94.5	
LL0124S LL0124M	LL0124S-1200	AC220-240V	60W	≥80	3000K/	≥0.9	105	Osram	120*2	Suspended / Mounted	Alu+PC	65*95*1200	2.6*3.7*47.2
	LL0124S-1500	or AC220-277V	100W	or 4000K/	65*95*1500							2.6*3.7*59.1	
	LL0124S-2400	50/60Hz	120W	≥90 5000K	65*95*2400							2.6*3.7*94.5	
LL0178S LL0178M	LL0178S-1200	AC220-240V	60W	≥80	3000K/	≥0.9	105	Osram	120*2	Suspended / Mounted	Alu+PC	75*95*1200	3.0*3.7*47.2
	LL0178S-1500	or AC220-277V	100W	or 4000K/	75*95*1500							3.0*3.7*59.1	
	LL0178S-2400	50/60Hz	120W	≥90 5000K	75*95*2400							3.0*3.7*94.5	



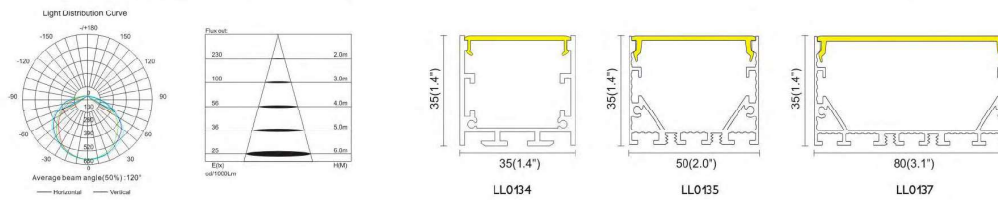


Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0134RS LL0134RM	LL0134RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	Suspended / Mounted	Alu+PC	35*35*1200	1.4*1.4*47.2
	LL0134RS-1500	36W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	35*35*1500			1.4*1.4*59.1	
	LL0134RS-2400	50W	≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	35*35*2400			1.4*1.4*94.5	
LL0135RS LL0135RM	LL0135RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	Suspended / Mounted	Alu+PC	50*35*1200	2.0*1.4*47.2
	LL0135RS-1500	36W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	50*35*1500			2.0*1.4*59.1	
	LL0135RS-2400	50W	≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	50*35*2400			2.0*1.4*94.5	
LL0137RS LL0137RM	LL0137RS-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	Suspended / Mounted	Alu+PC	80*35*1200	3.1*1.4*47.2
	LL0137RS-1500	60W	≥ 80	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	80*35*1500			3.1*1.4*59.1	
	LL0137RS-2400	70W	≥ 90	3000K/ 4000K/ 5000K	≥ 0.9	105lm/w	Osram	120	80*35*2400			3.1*1.4*94.5	






Linear (Suspended and Mounted) Series

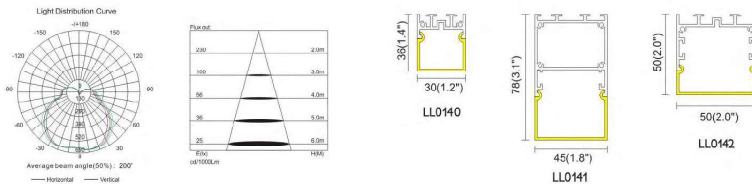

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0140RS LL0140RM	LL0140RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	105	Osram	200	Suspended / Mounted	Alu+PC	30*36*1200	1.2*1.4*47.2
	36W		30*36*1500									1.2*1.4*59.1	
	50W		30*36*2400									1.2*1.4*94.5	
LL0141RS LL0141RM	LL0141RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	105	Osram	200	Suspended / Mounted	Alu+PC	45*78*1200	1.8*3.1*47.2
	36W		45*78*1500									1.8*3.1*59.1	
	50W		45*78*2400									1.8*3.1*94.5	
LL0142RS LL0142RM	LL0142RS-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥80 or ≥90	3000K/ 4000K/ 5000K	≥0.9	105	Osram	200	Suspended / Mounted	Alu+PC	50*50*1200	2.0*2.0*47.2
	36W		50*50*1500									2.0*2.0*59.1	
	50W		50*50*2400									2.0*2.0*94.5	



Linear (Suspended and Mounted) Series

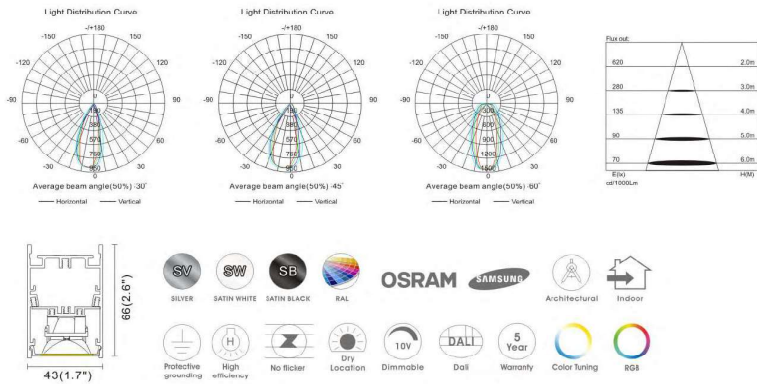

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0108S LL0108M	LL0108S-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥80	3000K/ 4000K/ 5000K	≥0.9	80	Osram	30/45/60	Suspended / Mounted	Alu+ PMMA	43*66*1200	1.7*2.6*47.2
	LL0108S-1500		50W	≥90	43*66*1500							1.7*2.6*59.1	
	LL0108S-2400		70W	≥90	43*66*2400							1.7*2.6*94.5	








PROJECT:		PREPARED BY:	
PART #:		QTY:	
NOTES:		DATE:	



PROJECT:		PREPARED BY:	
PART #		QTY:	
NOTES:		DATE:	

NSL SERIES - LINEAR



Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LLO105R	LL0105R-1200	AC220-240V or AC120-277V 50/60Hz	25W	≥80	3000K/4000K/5000K	≥0.9	105	Osram	120	Recessed	Alu+PC	50*30*1200	2.0*1.2*47.2
	36W		≥90	50*30*1500								2.0*1.2*59.1	
	50W		≥90	50*30*2400								2.0*1.2*94.5	
LLO106R	LL0106R-1200	AC220-240V or AC120-277V 50/60Hz	36W	≥80	3000K/4000K/5000K	≥0.9	105	Osram	120	Recessed	Alu+PC	65*35*1200	2.6*1.4*47.2
	50W		≥90	65*35*1500								2.6*1.4*59.1	
	70W		≥90	65*35*2400								2.6*1.4*94.5	
LLO147R	LL0147R-1200	AC220-240V or AC120-277V 50/60Hz	40W	≥80	3000K/4000K/5000K	≥0.9	105	Osram	120	Recessed	Alu+PC	95*35*1200	3.7*1.4*47.2
	60W		≥90	95*35*1500								3.7*1.4*59.1	
	80W		≥90	95*35*2400								3.7*1.4*94.5	









Features:

- Streamline design style, can be seamless connection with any dimension, with an elegant presentation;
- Can be grouped to different patterns to match the architecture style;
- High efficiency and energy saving;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBV
- Emergency for option;
- Different profile sizes are available to well light up the space!

Application:

Hotel, hospital, shopping mall, showroom, supermarket, office, KTV, museum, cinema, public buildings, etc.




Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0148R	LL0148R-1200	AC220-240V	50W	≥80	3000K/	≥0.9	105	Osram	120	Recessed	Alu+PC	95*75*1200	3.7*3.0*47.2
	LL0148R-1500	or AC20-277V	70W	or ≥90	4000K/							95*75*1500	3.7*3.0*59.1
	LL0148R-2400	50/60Hz	100W		5000K							95*75*2400	3.7*3.0*94.5
LL0149R	LL0149R-1200	AC220-240V	50W	≥80	3000K/	≥0.9	105	Osram	120	Recessed	Alu+PC	115*35*1200	4.5*1.4*47.2
	LL0149R-1500	or AC120-277V	80W	or ≥90	4000K/							115*35*1500	4.5*1.4*59.1
	LL0149R-2400	50/60Hz	100W		5000K							115*35*2400	4.5*1.4*94.5





Linear (Wall Mounted) Series

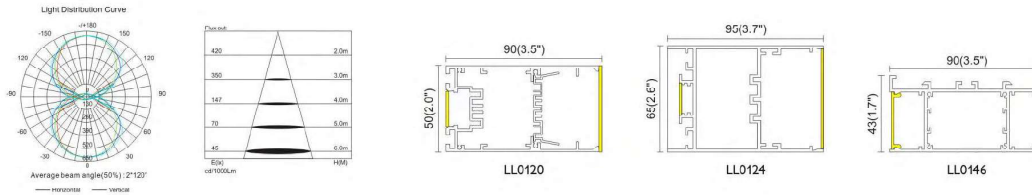

Model	Art.No.	Input Voltage(V)	Power	CRI	CCT (K)	PF	Efficacy (LM/W)	LED	Beam (degree)	Installation	Material	Size(mm) W*H*L	Size(Inch) W*H*L
LL0120W	LL0120W-1200	AC220-240V	50W	≥80	3000K/	≥0.9	105lm/w	Osram	120*2	wall mounted	Alu+PC	50*90*1200	2.0*3.5*47.2
	LL0120W-1500	or AC120-277V	70W	or ≥90	4000K/							50*90*1500	2.0*3.5*59.1
	LL0120W-2400	50/60Hz	100W	≥90	5000K							50*90*2400	2.0*3.5*94.5
LL0124W	LL0124W-1200	AC220-240V	60W	≥80	3000K/	≥0.9	105lm/w	Osram	120*2	wall mounted	Alu+PC	65*95*1200	2.6*3.7*47.2
	LL0124W-1500	or AC120-277V	100W	or ≥90	4000K/							65*95*1500	2.6*3.7*59.1
	LL0124W-2400	50/60Hz	170W	≥90	5000K							65*95*2400	2.6*3.7*94.5

