



| PROJECT: | PREPARED BY: | |
|----------|--------------|--|
| PART # | QTY: | |
| NOTES: | DATE: | |



NSL SERIES - PANEL



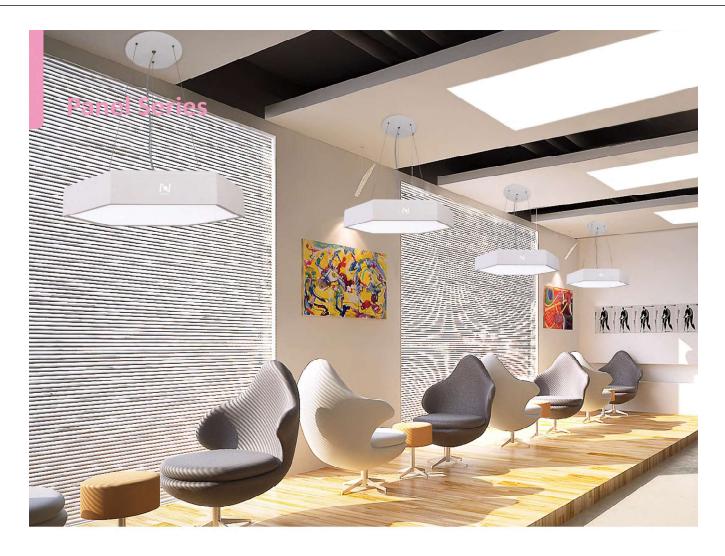







| Model | Input Voltage(V) | Power | CRI | CCT (K) | PF | Efficacy (LM/W) | LED | Beam (degree) | Installation | Material | Size(mm) W*H*L | Size(Inch) W*H*L | | |
|-----------------|---|--------------------|-----|------------|-----------------|--------------------|-----|------------------|--------------|----------|-------------------|---------------------|---------------|---------------|
| LL0603R3030-25W | AC220-240V or AC120-277V 50/60Hz | | | 25W | | | | | | | | | 300*300*24 | 11.8*11.8*0.9 |
| LL0603R6060-40W | | 40W | ≥80 | 3000K/ | | 142 | | 122 | | | 600*600*24 | 23.6*23.6*0.9 | | |
| LL0603R3012 40W | | AC120-277V 40W 590 | 40W | or ≥90 | 4000K/ 5000K | ≥0.9 | 105 | Samsung | 120 | Recessed | Alu+PMMA — | 300*1200*24 | 11.8*47.2*0.9 | |
| LL0603R6012-80W | | | | | | | | | | | 600*1200*24 | 23.6*47.2*0.9 | | |





| PROJECT: | PREPARED BY: | |
|----------|--------------|--|
| PART # | QTY: | |
| NOTES: | DATE: | |



NSL SERIES - PANEL































| Model | Input Voltage(V) | Power | CRI | CCT (K) | PF | Efficacy (LM/W) | LED | Beam (degree) | Installation | Material | Size(mm) W*H*L | Size(Inch) W*H*L |
|---------------|---|-----------------|-----------|---------------------------|---------|--------------------|---------|------------------|--------------------|---------------|-------------------|---------------------|
| LL0185M-25W | | 25W | | | ≥0.9 | 85 | Samsung | 120 | Surface Mounted | Alu+PC | 480*480*95 | 18.9*18.9*3.7 |
| LL0185M-40W | AC220-240V or | 40W | ≥80 | 3000K/ 4000K/ 5000K | | | | | | | 600*600*95 | 23.6*23.6*3.7 |
| 110185M-90W | AC120-277V 50/60Hz | 90W | or ≥90 | | | | | | | | 900*900*95 | 35.4*35.4*3.7 |
| LL0185M-180W | | 180W | | | | | | | | | 1200*1200*95 | 47.2*47.2*3.7 |
| LL01855-25W | AC220-240V or AC120-277V 50/60Hz | 25W | 0W ≥80 | 3000K/ 4000K/ 5000K | ≥0.9 | 85 | Samsung | 120 | Suspended | Alu+PC | 480*480*80 | 18.9*18.9*3.1 |
| 110185S-40W | | 40W | | | | | | | | | 600*600*80 | 23.6*23.6*3.1 |
| LL0185S-90W | | 90W | or ≥90 | | | | | | | | 900*900*80 | 35.4*35.4*3.1 |
| LL0185S 180W | | 180W | | | | | | | | | 1200*1200*80 | 47.2*47.2*3.1 |
| LL0185UDM-50W | | 50W | ≥80 | | | 05 | 6 | 12012 | Surface | Alvador | 480*480*95 | 18.9*18.9*3.7 |
| LL0185UDM-80W | AC220-240V or | 80W | | 3000K/ | | | | | | | 600*600*95 | 23.6*23.6*3.7 |
| L0185UDM-120W | AC120-277V 120W ≥90 | 4000K/ 5000K | ≥0.9 | 85 | Samsung | 120*2 | Mounted | Alu+PC | 900*900*95 | 35.4*35.4*3.7 | | |
| L0185UDM-220W | | 220W | | | | | | | | | 1200*1200*95 | 47.2*47.2*3.7 |
| LL0185UDS-50W | | 50W | | | | | | | Suspended | | 480*480*80 | 18.9*18.9*3.1 |
| LL0185UDS-80W | AC220-240V or | 80W | >80 | 3000K/ | >00 | 85 | | | | ALLIDO | 600*600*80 | 23.6*23.6*3.1 |
| L0185UDS-120W | AC120-277V 50/60Hz | 120W | or ≥90 | 4000K/ 5000K | ≥0.9 | 85 | Samsung | 120*2 | | Alu+PC | 900*900*80 | 35.4*35.4*3.1 |
| L0185UDS-220W | | 220W | | | | | | 1200*1200*80 | 47.2*47.2*3.1 | | | |







| PROJECT: | PREPARED BY: | |
|----------|--------------|--|
| PART # | QTY: | |
| NOTES: | DATE: | |





NSL SERIES - PANEL

Panel Series



























| | - |
|-----|-----|
|) | 13 |
| | PAI |
| - N | RAL |

| Model | Input Voltage(V) | Power | CRI | CCT (K) | PF | Efficacy (LM/W) | LED | Beam (degree) | Installation | Material | Size(mm) W*H*L | Size(Inch) W*H*L | |
|---------------|---|------------|-----------|---------------------------|------|--------------------|---------|------------------|--------------------|----------------------|----------------------|---------------------|--------------|
| LL0186M-25W | AC220-240V or AC120-277V 50/60Hz | 25W | | | | 9 85 | Samsung | 120 | Surface Mounted | Alu+PC | 480*416*95(ID480) | 18.9*16.4*3.7 | |
| LL0186M-40W | | 40W | ≥80 | 3000K/ | ≥0.9 | | | | | | 600*520*95(ID600) | 23.6*20.5*3.7 | |
| LL0186M-90W | | 90W | or ≥90 | 4000K/ 5000K | | | | | | | 900*780*95(ID900) | 35.4*30.7*3.7 | |
| LL0186M-180W | | 180VV | | | | | | | | | 1200*1040*95(ID1200) | 47.2*40.9*3.7 | |
| LL0186S-25W | AC220-240V or AC120-277V 50/60Hz | | 25W | | 7 | | | | | | | 480*416*80(ID480) | 18.9*16.4*3. |
| LL0186S-40W | | 40W | ≥80 | 3000K/ 4000K/ 5000K | ≥0.9 | 85 | Samsung | 120 | Suspended | Alu+PC | 600*520*80(ID600) | 23.6*20.5*3. | |
| LL0186S-90W | | 90W | or ≥90 | | | | | | | | 900*780*80(ID900) | 35.4*30.7*3. | |
| LL0186S-180W | | 180 | | | | | | | | | 1200*1040*80(ID1200) | 47.2*40.9*3. | |
| L0186UDM-50W | | 50VV | | | | | | | | | 480*416*95(ID480) | 18.9*16.4*3.7 | |
| L0186UDM-80W | AC220-240V or | 0r 80W ≥00 | 3000K/ | | - 20 | | 10040 | Surface | AL 100 | 600*520*95(ID600) | 23.6*20.5*3. | | |
| _0186UDM-120W | AC120-277V 50/60Hz | 120W | or ≥90 | 4000K/ 5000K | ≥0.9 | 85 | Samsung | 120*2 | Mounted | Alu+PC | 900*780*95(ID900) | 35.4*30.7*3. | |
| _0186UDM-220W | | 220W | | | | | | | | 1200*1040*95(ID1200) | 47.2*40.9*3. | | |
| LL0186UDS-50W | | 50W | | | | | | | | | 480*416*80(ID480) | 18.9*16.4*3.1 | |
| L0186UDS-80W | AC220-240V or | 80W | ≥80 | 3000K/ | | | | | | | 600*520*80(ID600) | 23.6*20.5*3. | |
| L0186UDS-120W | AC120-277V 50/60Hz | 12000 | or ≥90 | 4000K/ 5000K | ≥0.9 | 85 | Samsung | 120*2 | Suspended | Alu+PC | 900*780*80(ID900) | 35.4*30.7*3. | |
| L0186UDS-220W | 50/60Hz | 220W | | | | | | | | | 1200*1040*80(ID1200) | 47.2*40.9*3. | |