

PROJECT:		PREPARED BY:	
PART #		QTY:	
NOTES:		DATE:	

NSL SERIES - RAINBOW



Features:

- Novel design, beautiful lighting effect;
- High quality material for good reliability;
- Multi-color combination for option;
- Different dimming modes for option: 0-10V, Dali, Triac, RGBW
- Emergency for option;
- Long lifetime and energy efficient.

Application:


Hotel, office, restaurant, public building, etc.

Rainbow Series






CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: Suspended
 Material: Alu+PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118S-40W	40W	AC220-240V or AC120-277V 50/60Hz	D600*140	D23.6*5.5
LL0118S-90W	90W		D900*140	D35.4*5.5
LL0118S-180W	180W		D1200*140	D47.2*5.5




CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: 120°
 Installation: Surface Mounted
 Material: Alu+PC




Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL0118M-40W	40W	AC220-240V or AC120-277V 50/60Hz	D600*175	D23.6*6.9
LL0118M-90W	90W		D900*175	D35.4*6.9
LL0118M-180W	180W		D1200*175	D47.2*6.9



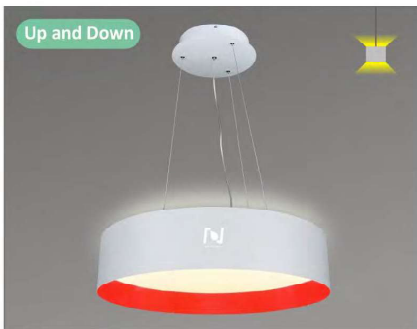

Up and Down

CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: $120^{\circ} \times 2$
 Installation: Suspended
 Material: Alu+PC




Model	Power	Input voltage(V)	Size(mm) D*H	Size(inch) D*H
LL0118UDS-60W	60W	AC220-240V or AC120-277V 50/60Hz	D600*140	D23.6*5.5
LL0118UDS-120W	120W		D900*140	D35.4*5.5
LL0118UDS-220W	220W		D1200*140	D47.2*5.5



Up and Down

CRI(Ra): > 80 or > 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 85
 LED type: Samsung
 Beam angle: $120^{\circ} \times 2$
 Installation: Surface Mounted
 Material: Alu | PC



Model	Power	Input voltage(V)	Size(mm) D*H	Size(inch) D*H
LL0118UDM-60W	60W	AC220-240V or AC120-277V 50/60Hz	D600*175	D23.6*6.9
LL0118UDM-120W	120W		D900*175	D35.4*6.9
LL0118UDM-220W	220W		D1200*175	D47.2*6.9






Diamond Series




CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PMMA




Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL020115S-12W-PRO	12W	AC220-240V or AC120-277V 50/60Hz	D300*88	D11.8*3.5
LL020115S-15W-PRO	15W		D360*88	D14.2*3.5
LL020125S-25W-PRO	25W		D450*88	D17.7*3.5
LL020136S-36W-PRO	36W		D600*88	D23.6*3.5
LL020150S-50W-PRO	50W		D800*88	D31.5*3.5



Diamond Series

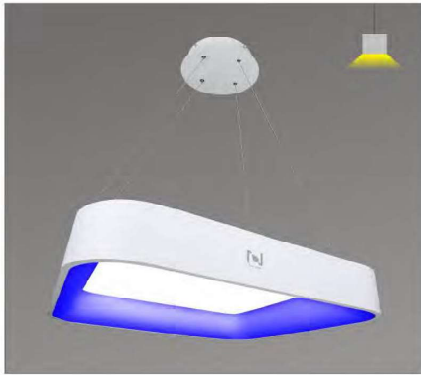


CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Suspended
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL020215S-15W-PRO	15W	AC220-240V or AC120-277V 50/60Hz	360*360*88	14.2*14.2*3.5
LL020225S-25W-PRO	25W		450*450*88	17.7*17.7*3.5
LL020236S-36W-PRO	36W	AC120-277V 50/60Hz	600*600*88	23.6*23.6*3.5
LL020250S-50W-PRO	50W		800*800*88	31.5*31.5*3.5




CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Mounted
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) D*H	Size(Inch) D*H
LL020115M-12W-PRO	12W	AC220-240V or AC120-277V 50/60Hz	D300*116	D11.8*4.6
LL020115M-15W-PRO	15W		D360*116	D14.2*4.6
LL020125M-25W-PRO	25W	AC120-277V 50/60Hz	D450*116	D17.7*4.6
LL020136M-36W-PRO	36W		D600*116	D23.6*4.6
LL020150M-50W-PRO	50W		D800*116	D31.5*4.6



CRI(Ra): ≥ 80 or ≥ 90
 CCT(K): 3000/4000/5000
 PF: ≥ 0.9
 Efficiency(LM/W): 70
 LED type: Samsung
 Beam angle: 160°
 Installation: Mounted
 Material: Alu+PMMA



Model	Power	Input voltage(V)	Size(mm) L*W*H	Size(Inch) L*W*H
LL020215M-12W-PRO	15W	AC220-240V or AC120-277V 50/60Hz	360*360*116	14.2*14.2*4.6
LL020225M-12W-PRO	25W		450*450*116	17.7*17.7*4.6
LL020236M-12W-PRO	36W	AC120-277V 50/60Hz	600*600*116	23.6*23.6*4.6
LL020250M-12W-PRO	50W		800*800*116	31.5*31.5*4.6

